

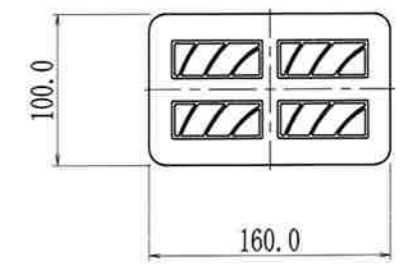
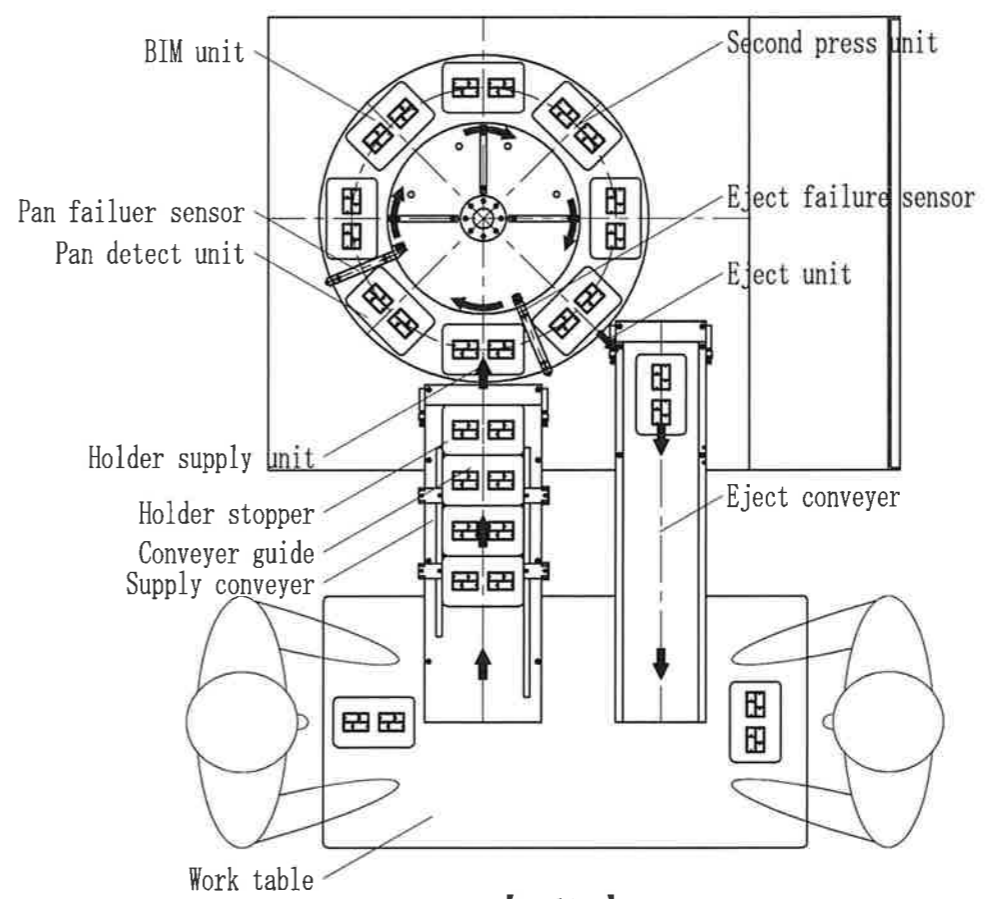
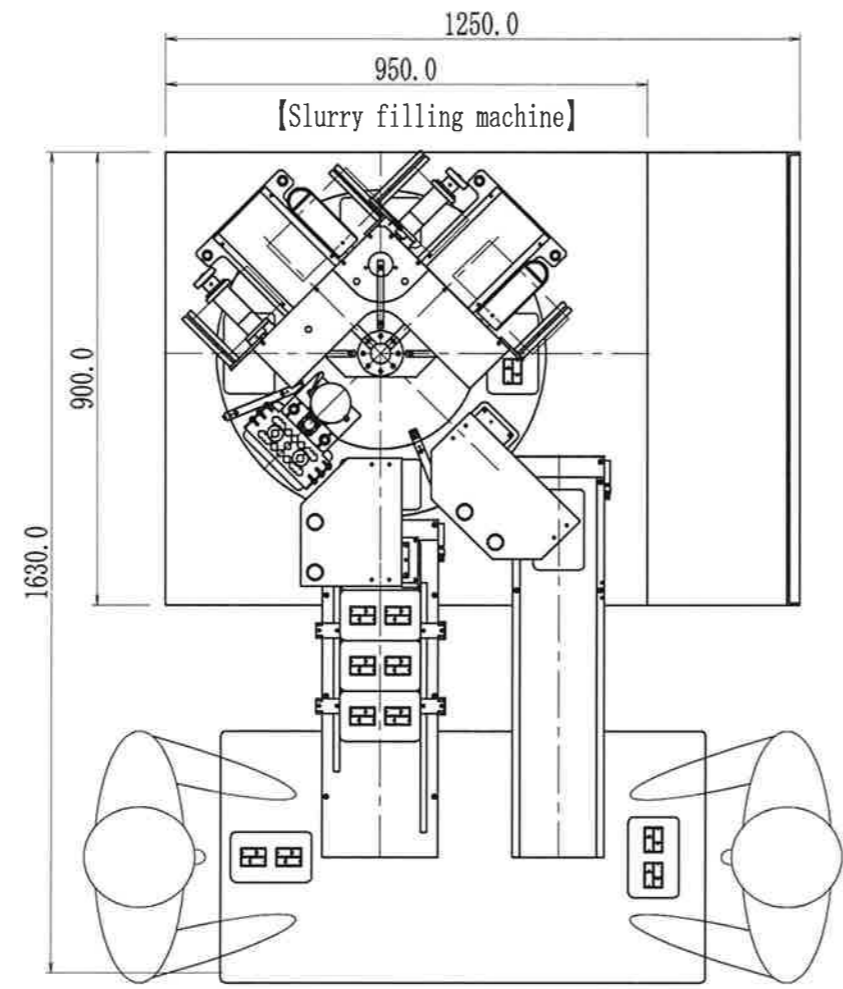


NO. 23-HP-M0002

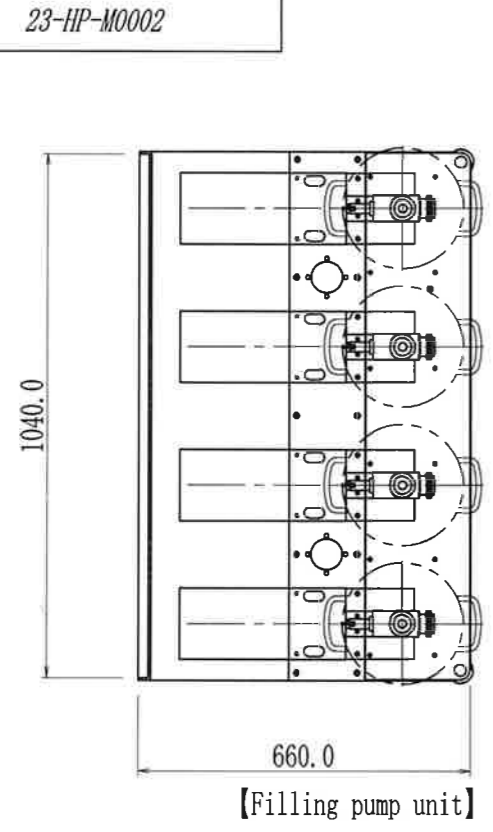

【Outline】

【Holder dimension】

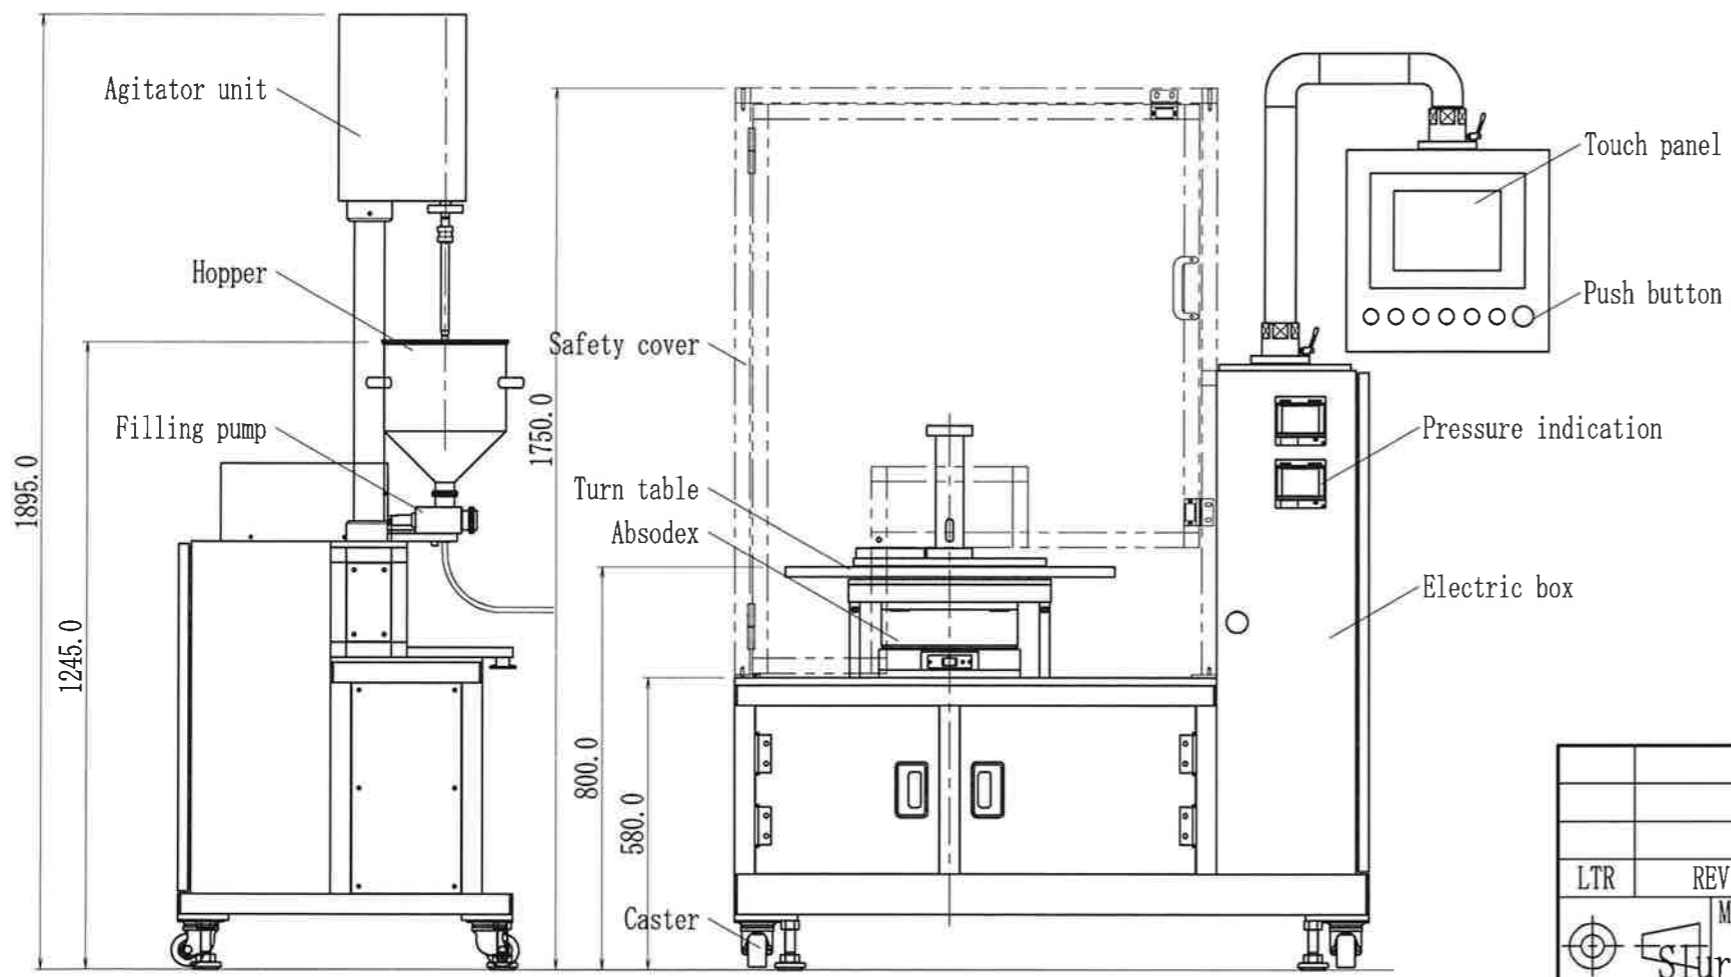

Specification
 Power source Electric : AC200V(3Phases) 30A-1line Air : More than 0.5Mpa-1 line
 Object Cosmetic powder for foundation, eye shadow, face color and so on
 Number of color - 6 colors(Pumps) This drawing shows 4 pumps
 Pan size 2 pans in 1 holder : 60mm x 70mm(max)
 4 pans in 1 holder : 30mm x 60mm(max)
 8 pans in 1 holder : 25mm x 30mm(max)
 Speed 2 pans in 1 holder BIM : 16pcs/min
 4 pans in 1 holder BIM : 32pcs/min
 8 pans in 1 holder BIM : 64pcs/min
 1 pan in 1 holder Top filling : 8pcs/min
 ※In case of the filling time is less than 4 sec
 Operator 2 - 4 (Pan supply, product ejection)
 ※Possible to reduce the operator bypan supply feeder(Optional)
 Transportation Turn table
 Press mechanism Servo motor Pressure : 50kgf - 350kgf
 Pump mechanism Servo motor BIM : Torque(pressure) control, Top filling : Position control

			PLAN	DR	11' 07/05	CHK	11' 07/05	APP
			M. Arashida	M. Arashida	M. Arashida	M. Arashida	M. Arashida	M. Arashida
			SCALE					
LTR	REVISION RECORD	DR	CHK	DATE	1:15	NANYO CO., LTD.		
M/C NAME				TITLE				
Slurry filling machine rotary type				Reference drawing for web site				